

www.ime.de

Copyright © 2024, TELTONIKA NETWORKS. Specifications and information given in this document are subject to change by TELTONIKA NETWORKS without prior notice




KEY FEATURES

HARDWARE

CPU	Mediatek, 580 MHz, MIPS 24KEc
Storage	16 MB serial NOR flash
Memory	128 MB, DDR2
Powering options	3-pos plugable terminal block, 9-30 VDC
Antenna connectors	1 x RP-SMA for Wi-Fi
Ethernet	2 x 10/100 Ethernet ports: 1 x WAN, 1 x LAN
WiFi	IEEE 802.11b/g/n, Access Point (AP), Station (STA)
Other	1 x Grounding screw
Status LEDs	1 x WAN type LED, 1 x LAN type LED, 1 x Power LED
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with integrated din rail
Dimensions (W x H x D)	113.10 x 25 x 68.6 mm
Weight	142.3 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, SFTP, FTP, SMTP, SSL/TLS, ARP, VRRP, PPP, PPPoE, UPNP, SSH, DHCP, Telnet, SMPP, SMNP, MQTT, Wake On Lan (WOL)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard, Tinc
Monitoring and Management	WEB UI, CLI, SSH, SMS, Call, Email, TR-069, SNMP, JSON-RPC, MQTT, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity
Hotspot	Captive portal (Hotspot), internal/external Radius server, SMS authorization, internal/external landing page, walled garden, user scripts, URL parameters, user groups, individual user or group limitations, user management, 9 default customizable themes and option to upload and down- load customised botspot themes

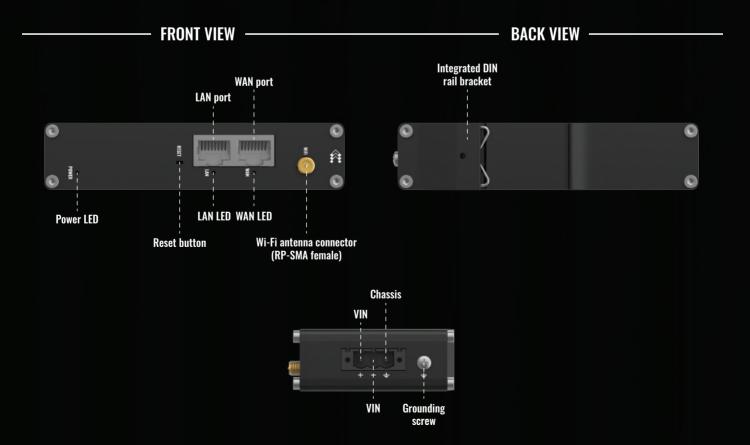

www.ime.de

FLYER // RUT140